


CMAXR18HP0-1A2

Product Specification For Common Mode Chokes

Mechanical Specification

Bare Core Dimensions:	(30 × 20 × 10 mm)
Le:	7.75 cm
Ae:	0.36 cm ²
Packing:	35 Pc/Layer, 6 Layers/Box
Box Quantity:	210 Pieces
Core Material:	Nanocrystalline
Currie Temp:	1,112°F (600 °C)
RTI Temp (0.81):	248°F (120°C)
Marking:	CMAXR18HP0-1A2

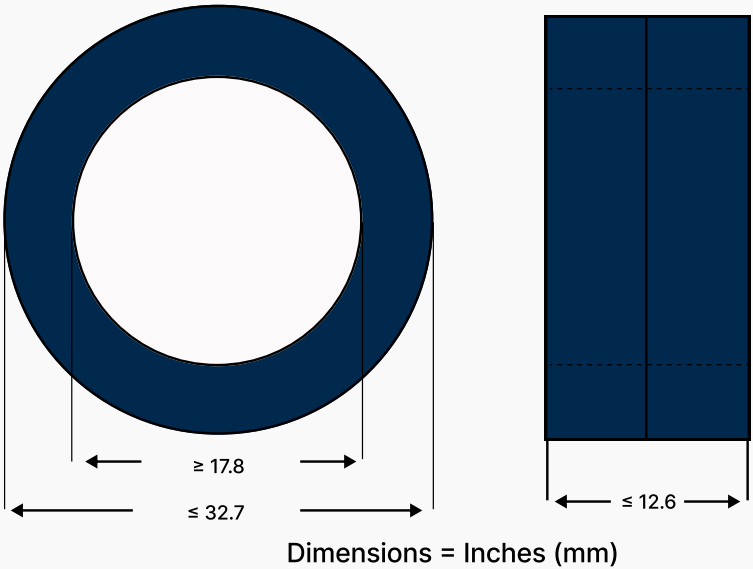

Electrical Performance Parameters

Permeability @ Frequency = 10 KHz and Hpeak = 3.65 mA/cm
~30,000

Inspection Value

Measured Value:	A_L (μH/N ²)	A_L (μH/N ²)
Measurement Limits:	13.6-27.2	6.7-NA
Frequency:	10 KHz	100 KHz
$L_{eff} * N$ (mA*turn):	20	20

Core Finishing

Type:	Plastic Case	Case Material Alternatives:	Zytel FR70G25	Rynite FR530	Longlite 413	PA66-R11G25
Voltage Breakdown	2,500 VRMS	Case UL File Number:	E41938	E41938	E59481	E484599

*Saturation Current (Isat) Of Nanocrystalline Material: Peak Value Of The Exiting Current When The Initial Inductance Level Is Dropped To 10 Per Cent. Saturation Behaviour Is Dependant On Frequency, Signal Shape And Leakage Field. The Current Value Is A Calculated Value For Design Help Only And Cannot Be Guaranteed. Isat Is Calculated

@ B = 1.0 T - μ_{nom} - N = 1.

Certification

Rev #	Date	Description	Drawing Approval	Drawing Number
-	-	Initial Issue	Engineering: V. Saini	CMAXR18HP0-1A2
00	20/01/2026	Issued For Procurement	Sales: Mujeeb Khan	

Voxbourne Energy Certifies That The Manufacturing And The Quality Process Meet All Requirements Of IEC Part 1: General Specification For "Fixed Inductors For Electromagnetic Interference Suppression", IEC 60938-1:1999 + A1:2006. This International Standard Is Used In Lieu Of Requirements/Documents Pertaining To UL, CE, CSA, DIN And Other Individual Agencies. The Flame Insulation Rating Meets UL-94V-0. Voxbourne Energy Certifies The Product Described Herein Is In Compliance With The Directive 2011/65/EU Of The European Parliament And Of The Council Of 8 June, 2011 On The Restriction Of The Use Of Certain Hazardous Substances In Electrical And Electronic Equipment (RoHS2 Directive).